

**KRAFT CURING's** VAPOR Curing systems provide for the accelerated hardening of concrete pipe and precast concrete products.

The direct-fired vapor generator in conjunction with temperature sensor(s) and motorized control valve(s) accelerates concrete strength gain and increases concrete quality through the controlled addition of heat and humidity, providing harder pipe bells and spigots and reducing demoulding times.



## INTERESTED? CONTACT US.

## VAPOR CURING II ACCELERATED CONCRETE CURING SYSTEM




### **Kraft Curing Systems GmbH**

Muehlenberg 2 | 49699 Lindern | Germany  
+49.5957.9612.0 | [info@kraftcuring.com](mailto:info@kraftcuring.com)

### **Kraft Curing Systems, Inc.**

300 Ben Fairless Drive | Fairless Hills, PA 19030 | USA  
+1.267.793.1005 | [info@kraftcuring.com](mailto:info@kraftcuring.com)

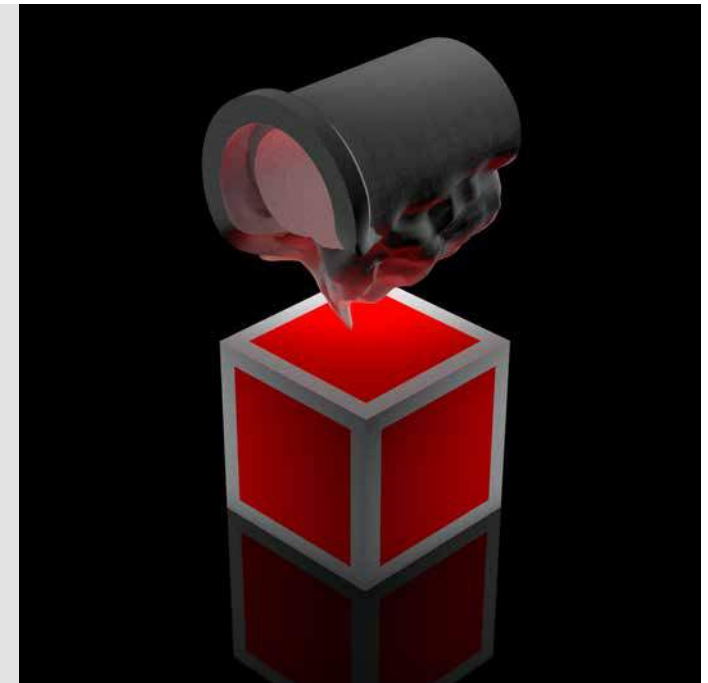



## OUR GUARANTEE

-  vapor curing accelerates the concrete hardening process
-  higher concrete quality through the controlled addition of heat and humidity
-  rugged, dependable and durable equipment
-  98 % operating efficiency
-  fully automatic and low pressure operation
-  water-cooled 304L stainless steel combustion chamber

## YOUR BENEFIT

-  harder bells and spigots, less breakage
-  60 % lower operating cost than a steam boiler
-  small footprint, simple and safe to operate
-  8–12 hour hardening duration for concrete pipe, 4–8 hour hardening duration for precast concrete
-  curing temperatures from 35 °C (95 °F) to 80 °C (180 °F)
-  platinum lifetime combustion chamber warranty