

KRAFT CURING's VAPOR Curing systems provide for the accelerated hardening of prestress and precast concrete products.

The direct-fired vapor generator in conjunction with temperature sensor(s) and motorized control valve(s) accelerates concrete strength gain and increases concrete quality through the controlled addition of heat and humidity, providing 60 % energy savings over a boiler and preventing shrinkage cracking.

**INTERESTED?
CONTACT US.**

VAPOR CURING III

ACCELERATED CONCRETE CURING SYSTEM




Kraft Curing Systems GmbH

Muehlenberg 2 | 49699 Lindern | Germany
+49.5957.9612.0 | info@kraftcuring.com

Kraft Curing Systems, Inc.

300 Ben Fairless Drive | Fairless Hills, PA 19030 | USA
+1.267.793.1005 | info@kraftcuring.com

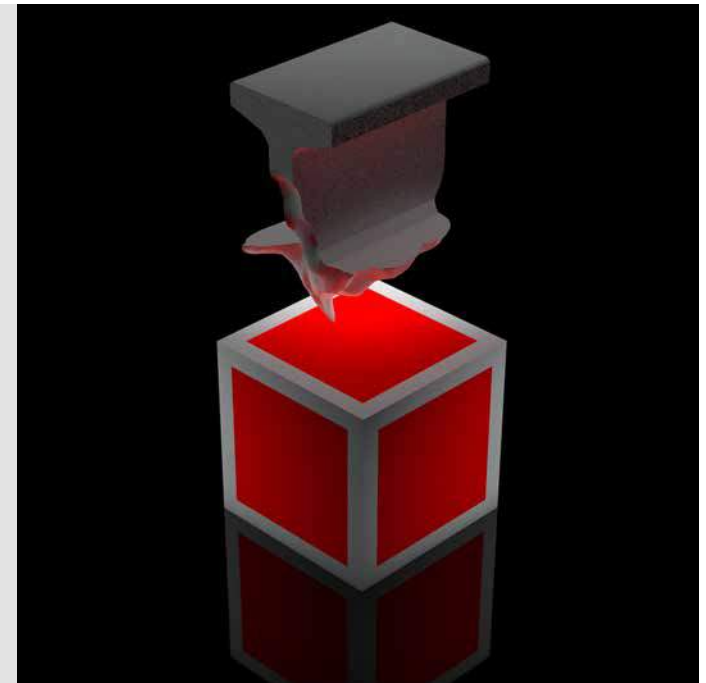



OUR GUARANTEE



vapor curing accelerates the concrete hardening process



higher concrete quality through the controlled addition of heat and humidity



rugged, dependable and durable equipment



98 % operating efficiency



fully automatic and low pressure operation



water-cooled 304L stainless steel combustion chamber

YOUR BENEFIT



60 % lower operating cost than a steam boiler



increase form/mould turn-over, reduce form/mould costs



optional curing data accumulation and match cure solutions



8–10 hour hardening duration for precast walls,
8–10 hour hardening duration for hollow-core,
16–18 hour hardening duration for prestress concrete



small footprint, simple and safe to operate



platinum lifetime combustion chamber warranty